

일반논문 (Regular Paper)

방송공학회논문지 제31권 제5호, 2026년 9월 (JBE Vol.31, No.5, September 2026)

<https://doi.org/10.5909/JBE.2026.31.5.1069>

ISSN 2287-9137 (Online) ISSN 1226-7953 (Print)

SemINR: 초분광 영상 압축을 위한 의미 기반 암시적 신경 표현

Maryam Qamar^{a)}, 배 성 호^{a)†}

SemINR: Semantic-Guided Implicit Neural Representation for Hyperspectral Compression

Maryam Qamar^{a)} and Sung-Ho Bae^{a)†}

요 약

초분광 영상(HSI)은 풍부한 분광 및 공간 정보를 제공하지만, 막대한 저장 및 전송 부담을 야기한다. 암시적 신경 표현(INR)은 다층 퍼셉트론(MLP)을 단일 데이터 인스턴스에 과적합시킴으로써 좌표 기반 데이터 압축을 위한 강력한 패러다임으로 부상하였다. 그러나 기존의 INR은 평균 제곱 오차(MSE)와 같은 픽셀 수준의 시각적 복원 오차만을 최적화 대상으로 삼기 때문에 지형 및 물체의 경계를 반영하지 못한다. 본 연구에서는 암시적 신경 표현에 보조 의미 헤드를 결합한, 초분광 영상을 위한 의미 인식 INR 압축 파이프라인을 제안한다. 학습 과정에서 이 보조 헤드는 네트워크의 내부 표현이 장면의 실제 범주형 구조(ground-truth categorical layout)와 정렬되도록 강제한다. 특히, 보조 프로젝터는 학습이 끝난 후 완전히 제거되므로, 최종 압축된 모델 가중치에 저장 공간이나 추론 연산 상의 추가 부담이 전혀 발생하지 않는다. Indian Pines, Pavia University 및 Houston13 벤치마크에서 평가한 결과, 제안된 방법은 저장 요구량이나 디코더 구조의 변경 없이 PSNR 성능을 향상시키며, 시각적 및 분광적 복원 충실도를 크게 개선하는 것으로 나타났다.

Abstract

Hyperspectral images (HSIs) offer rich spectral and spatial content but pose immense storage and transmission burdens. Implicit Neural Representations (INRs) have emerged as a powerful paradigm for coordinate-based data compression by overfitting a multilayer perceptron (MLP) to a single data instance. However, traditional INRs optimize purely for pixel-level visual reconstruction error (e.g., Mean Squared Error), ignoring sharp object boundaries inherent to the geographic or material structure. In this work, we propose a semantic-aware INR compression pipeline for HSIs that incorporates a temporary auxiliary semantic head alongside the primary coordinate-to-intensity network. During training, this auxiliary head forces the network's internal representations to align with the ground-truth categorical layout of the scene. Crucially, the auxiliary projector is completely discarded after training, ensuring that zero storage or inference overhead is added to the final compressed model weights. Evaluated on the Indian Pines, Pavia University, and Houston13 benchmarks, our approach significantly improves visual and spectral reconstruction fidelity, boosting PSNR performance without changing the storage requirements or decoder architecture.

Keyword : Hyperspectral Images, Compression, Implicit Neural Representation, Semantic Regularization

I. Introduction

Hyperspectral imaging captures the electromagnetic spectrum across hundreds of contiguous channels for each pixel, expanding beyond standard RGB capabilities to enable precise object detection, material analysis, and chemical identification^[1]. These properties make HSIs vital in fields including remote sensing, environmental monitoring, agriculture, medicine, and defense^{[2][3][4][5][6][7][8][9][10][11]}. However, acquiring hundreds of bands implies that HSIs demand orders of magnitude more storage space than conventional color images, creating massive transmission bottlenecks for satellite and airborne platforms^[12].

To mitigate these challenges, learning-based compression frameworks have shown considerable progress^{[13][14][15]}. Notably, in recent developments, implicit neural representations (INRs) formulate compression as a network overfitting process^[16]. Instead of saving a dense grid of values, a continuous mapping function parameterized by a neural network maps 2D spatial coordinates (x, y) directly to the corresponding channel vector $[ch_0, ch_1, \dots, ch_n]$. Compression is achieved by storing the network parameters Θ rather than the image itself.

Despite their success, standard INR^[17] models are strictly optimized using mean squared error (MSE), which focuses uniformly on low-level signal reconstruction. This ignores the thematic arrangement of the earth's surface. Because vanilla coordinate networks lack categorical awareness, they frequently oversmooth and blur fine-grained spectral distributions along material boundaries to satisfy global

pixel averages.

To address this boundary degradation, we present a semantic-regularized coordinate network for HSI compression. Specifically, we insert an auxiliary semantic head that translates the shared internal features of the network into class label space. Using available classification ground-truth maps, we supervise this head during the continuous encoding phase via cosine-similarity-based semantic loss. Maximizing semantic cosine similarity between predicted and target class space forces the hidden layers of the model to learn a representation sensitive to categorical boundaries which minimizes inter-band spectral mixing and spatial blurring along material edges. It is noted that because of the auxiliary semantic head being completely deleted once the training concludes, the physical configuration, parameters, and storage constraints of the model during deployment remain identical to the baseline architecture. We achieve structural enhancement during decoding entirely for free.

II. Background

For visual data such as a hyperspectral image $I \in \mathbb{R}^{H \times W \times B}$ containing $H \times W$ spatial locations across B spectral bands, the INR framework overfits a neural network Φ to that single specific data instance. The network acts as a continuous coordinate-to-value mapping function, parameterizing the image domain through the following forward pipeline:

$$\hat{X} = \Phi(p; \Theta), \quad (1)$$

where $p = (x, y) \in \mathbb{R}^2$ represents the normalized continuous spatial coordinates of a queried pixel location within the image domain, typically $x, y \in [-1, 1]$, Θ represents the network parameters and $\hat{X} \in \mathbb{R}^B$ denotes the

a) 경희대학교 컴퓨터공학부(School of Computing, Kyung Hee University)

‡ Corresponding Author : 배성호(Sung-Ho Bae)

E-mail: shbae@khu.ac.kr

Tel: +82-31-201-2593

ORCID: <https://orcid.org/0000-0003-2677-3186>

※ This work was supported by a grant from Kyung Hee University in 2022 (KHU-20220914).

· Manuscript received August 10, 2026; Revised September 5, 2026;

Accepted September 7, 2026.

predicted continuous output vector, capturing the full B-dimensional spectral intensity signature corresponding exactly to coordinate *point p*.

During the encoding phase, the objective is to optimize the parameter set Θ on a per-instance basis to minimize a structural reconstruction loss function, such as Mean Squared Error (MSE), over all pixel coordinates:

$$\operatorname{argmin}_{\Theta} \frac{1}{N} \sum_{i=1}^N \|X_i - \Phi(p_i; \Theta)\|^2. \quad (2)$$

where N , p_i , and X_i represent total number of pixels, i -th coordinates and the actual signal vector, respectively. Once optimization is complete, the compact network parameters Θ are stored as the final compressed representation of the image. To reconstruct or decode the data on demand, the saved neural network is queried across a grid of target coordinates, smoothly generating the original spectral values.

III. Related Works

Hyperspectral image compression is generally organized into traditional coding standards and deep-learning paradigms. Traditional approaches eliminate spectral redundancies via PCA, compressing residual bands with spatial engines like JPEG or JPEG2000^[18].

Deep learning-based schemes have utilized autoencoders and variational frameworks to achieve compact latent code spaces^{[13][14][15]}, however these require longer training and need more data for optimal learning. Recent advancements in coordinate-based deep learning have positioned implicit neural representations^[17] as a highly competitive paradigm for continuous data compression. Notably, Rezasoltani and Qureshi^[19] introduced an HSI compression framework using a multilayer perceptron optimized with periodic sinus-

oidal activations. Rather than preserving discrete spatial grids, their method overfits a compact neural network to map normalized 2D coordinates (x, y) directly to full multi-band spectral intensity vectors. This framework saves the network weights as a highly compressed continuous proxy that can be queried on demand to decode the original scene. While their evaluation across benchmarks like Indian Pines and Pavia University demonstrates that SIREN effectively bypasses traditional grid constraints and outperforms baseline standards like JPEG and JPEG2000, it relies strictly on a pixel-level Mean Squared Error (MSE) objective. Consequently, this standard INR approach treats all pixels as uniform signals, leaving it prone to spatial oversmoothing and high-frequency spectral cross-contamination along distinct land-cover material boundaries.

IV. Methodology

To overcome the spatial oversmoothing and inter-band spectral mixing typical of conventional coordinate networks, we propose a semantic-aware INR framework for HSI compression. The core objective of our method is to embed high-level thematic awareness directly into the network's parameter space during the encoding phase. We achieve this by introducing a temporary auxiliary semantic head consisting of a single linear layer optimized via a directional similarity constraint against the class distribution layout. By forcing the internal layers of the continuous network to align with these categorical boundaries, the model develops structural transitions. The proposed structural expansion of the baseline architecture and its corresponding optimization strategy is detailed below.

1. Auxiliary Semantic Head

To embed semantic boundaries into the weight space

without expanding the final file size, we introduce a secondary semantic head, $\mathcal{G}_\Psi \mathcal{G}_\Psi$, which branches out from the deep features of the main network during training. Let $\mathcal{S} = g_\Psi(\Phi(p; \Theta))$ yield the semantic prediction.

Given a pixel class label $y \in \{0, 1, \dots, C - 1\}$, we transform the categorical target into a one-hot representa-

tion vector, denoted as $\mathbf{T} = \text{OneHot}(y) \in \mathbb{R}^C$.

2. Multi-Objective Training Strategy

In addition to the reconstruction loss, we apply semantic loss which evaluates the mean cosine similarity between the model's semantic output (S) and ground truth classes

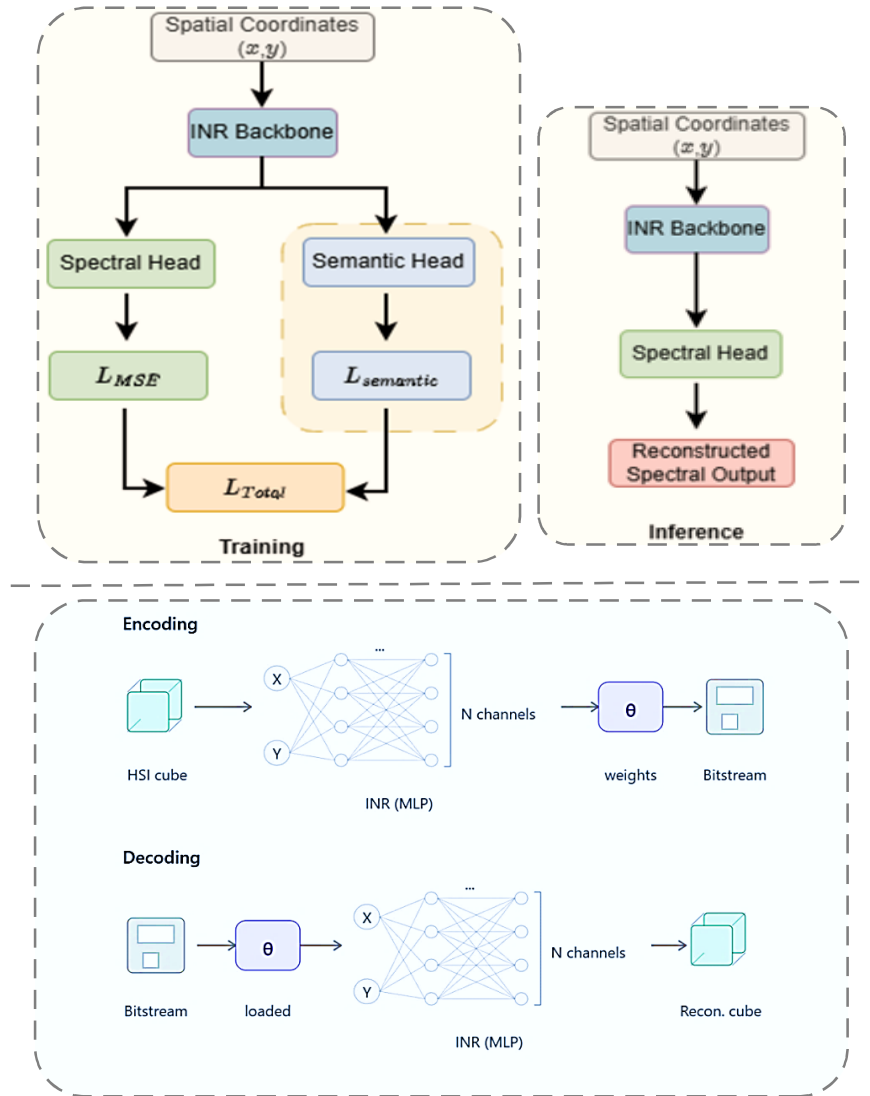


그림 1. 방법론 개요: (상단) 전체 프레임워크로, 오른쪽 패널의 추론 과정에서 학습 후 시맨틱 헤드가 제거됨을 보임. (하단) INR을 통한 HSI 데이터 큐브의 인코딩-디코딩 흐름.

Fig. 1. Overview of Methodology: (Top row) Overall framework where inference in right panel shows the semantic head is discarded after training. (Bottom row) Encoding-decoding flow of an HSI data cube via INR.

(T) as:

$$L_{semantic} = 1.0 - \frac{1}{N} \sum_{i=1}^N \langle S_i, T_i \rangle / \|S_i\|_2 \|T_i\|_2 \quad (3)$$

The net objective function balancing fidelity and class structure behaves as follows:

$$L_{total} = L_{MSE}(X, \hat{X}) + \alpha \cdot L_{semantic} \quad (4)$$

where $L_{MSE} = \frac{1}{N} \sum \|X_i - \hat{X}_i\|^2$, and α is a scaling weight assigned as 10^{-5} to guide the representations without dominating the primary visual recovery task.

Standard cross-entropy optimization makes the model map its outputs into an exact probabilistic distribution, maximizing the probability of the correct class index, this forces the model weights to continuously scale up so that the correct class score approaches positive infinity relative to other classes. This magnitude-driven pressure demands a significant portion of the network's capacity. In contrast, we optimize thematic alignment by constraining the directional correlation of the latent feature vectors within a multi-dimensional Euclidean space. By transforming ground-truth categorical labels into a series of mutually orthogonal axes via one-hot encoding, each land-cover material class is modeled as a definitive geometric direction. The semantic loss then explicitly calculates the mean cosine similarity complement across all pixel coordinates, without being affected by magnitude variance to optimize vector collinearity by forcing the network's auxiliary predictions to run parallel to the targeted ground-truth axis. Because these auxiliary predictions are derived from the shared internal parameters of the core continuous backbone, this purely directional restriction acts as a structural regulator, guiding the network to align with the material category changes, thereby regularizing the oversmoothing.

Once the network training finishes, the auxiliary module parameters are strictly excluded from storage files and inference execution ensuring that the bitstream budget remains strictly equivalent to the baseline. The overview of our framework along with encoding-decoding scheme of compression using INR is illustrated in Figure 1.

V. Experiments and Results

The proposed framework was implemented using PyTorch and evaluated on three benchmark hyperspectral datasets, Indian Pines, Pavia University, and Houston13. Indian Pines comprises 145×145 pixels covering 200 spectral bands after removal of water absorption bands, containing 16 land-cover categories. Pavia University spans a 610×340 grid containing 103 spectral channels, with 9 classes. Houston13 covers a 349×1905 grid with 48 spectral bands, containing 15 land-cover categories. Each network follows a SIREN backbone with periodic sinusoidal activations. We empirically selected $w_0 = 30.0$ for the first layer and $w_0 = 50.0$ for all subsequent hidden and output layers by tuning on a single network configuration on the Indian Pines dataset, then fixed these values as defaults across all remaining experiments. All networks were optimized using the Adam optimizer with a learning rate of 2×10^{-4} for 8,000 iterations per scene, on a single RTX 3090 GPU. To generate the PSNR - bpppb curves in Figure 2, depth and width were varied, as this is the primary factor controlling model size (and thus bpppb) in INR-based compression, while all other hyperparameters were held constant. Reconstruction fidelity is assessed using Peak Signal-to-Noise Ratio (PSNR) measured in decibels (dB) with higher values representing better reconstruction. Spectral distortion is evaluated using the Spectral Angle Mapper (SAM), where lower values indicate better preservation of spectral curves. Storage consumption is measured

via bits per pixel per band (bpppb).

These metrics are formally defined as follows.

$$\text{PSNR} = 10\log_{10}\left(\frac{L^2}{\text{MSE}}\right) \quad (5)$$

where $\text{MSE} = \frac{1}{N} \sum_{i=1}^N \|X_i - \hat{X}_i\|^2$, with X_i and its reconstruction denoting the i -th ground-truth and reconstructed pixel spectra over all N pixel coordinates as in Eq. (2), and L denoting the maximum possible pixel intensity of the data or 1 for normalized data.



그림 2. Indian Pines(상단), Pavia University(중단), Houston13(하단) 데이터셋에서 제안한 방법과 베이스라인의 bpppb 대비 PSNR 및 SAM 결과. 제안된 방법은 세 데이터셋 모두에서 두 지표를 일관되게 향상시킴.

Fig. 2. PSNR and SAM vs. bpppb for our method and baseline on Indian Pines (top row), and Pavia University (middle row), and (bottom row) Houston13 datasets. The proposed method consistently improves both metrics on all three datasets.

$$SAM = \frac{1}{N} \sum_{i=1}^N \cos^{-1} \left(\frac{X_i \cdot \hat{X}_i}{\|X_i\|_2 \|\hat{X}_i\|_2} \right) \quad (6)$$

$$bpppb = \frac{\text{bits}(\theta)}{H \times W \times B} \quad (7)$$

where $\text{bits}(\theta)$ is the total bit length of the stored network parameters, and H , W , and B are the height, width, and number of spectral bands of the hyperspectral cube.

1. Evaluation and Discussion

To verify the efficacy of the proposed semantic-regularized optimization strategy, we evaluate our framework against the baseline using PSNR and SAM given a $bpppb$.

The experimental trends in Figure 2 demonstrate that incorporating a directional semantic constraint consistently outperforms the baseline on all three datasets yielding a consistent PSNR gain and BD-PSNR gain of up to +0.51dB. These gains validate our core hypothesis that forcing the shared internal layer representations to implicitly align with ground-truth categorical layouts prevent the oversmoothing, typical of purely pixel-level objectives, preserving fine-grained details. This structural preservation is further evidenced by SAM metric, which exhibits a decline when the semantic constraint is introduced. This indicates that the continuous coordinate mapping retains highly accurate, pure spectral signatures, successfully mitigating the inter-band cross-contamination along material borders. It is noted here that we define a boundary as the spatial edge of any labeled semantic region, regardless of what borders it (another labeled class or unlabeled background), since oversmoothing manifests at the edge of any structurally distinct region. Crucially, because the auxiliary semantic head is completely discarded prior to deployment, these architectural and spectral fidelity enhancements are achieved at zero additional storage or inference overhead,

leaving the bits-per-pixel-per-band ($bpppb$) footprints strictly identical to the baseline model and successfully fulfilling the compression objective. Additionally, Tables 1 and 2 compare our method for two datasets with other standard compression schemes showing better performance for both datasets.

표 1. Indian Pines 데이터셋에서 $bpppb$ 0.2 기준 다른 방법들과의 비교.
Table 1. Comparison with other methods at $bpppb$ 0.2 for Indian Pines dataset.

Method	PSNR
JPEG	32.7
JPEG2000	34.8
PCA-DCT	33.2
Baseline	44.7
Ours	45.2

표 2. Pavia University 데이터셋에서 $bpppb$ 0.1 기준 다른 방법들과의 비교.
Table 2. Comparison with other methods at $bpppb$ 0.1 for Pavia University dataset.

Method	PSNR
JPEG	17.8
JPEG2000	17.1
PCA-DCT	24.6
Baseline	33.6
Ours	33.8

Figure 3 provides a qualitative comparison across three hyperspectral benchmarks, Indian Pines, Pavia University, and Houston13, showing reconstructions from the baseline, and our method alongside ground truth (original data) and semantic label map for reference. For each scene, a small region spanning distinct semantic classes is magnified, allowing direct visual inspection of reconstruction fidelity. Across all three datasets, the baseline exhibits visible blurring and loss of structural detail at semantic boundaries, with fine object edges and small structures noticeably smeared into neighboring regions. In contrast, our method preserves sharper, more faithful boundaries that align more closely with the ground truth, consistent with our design

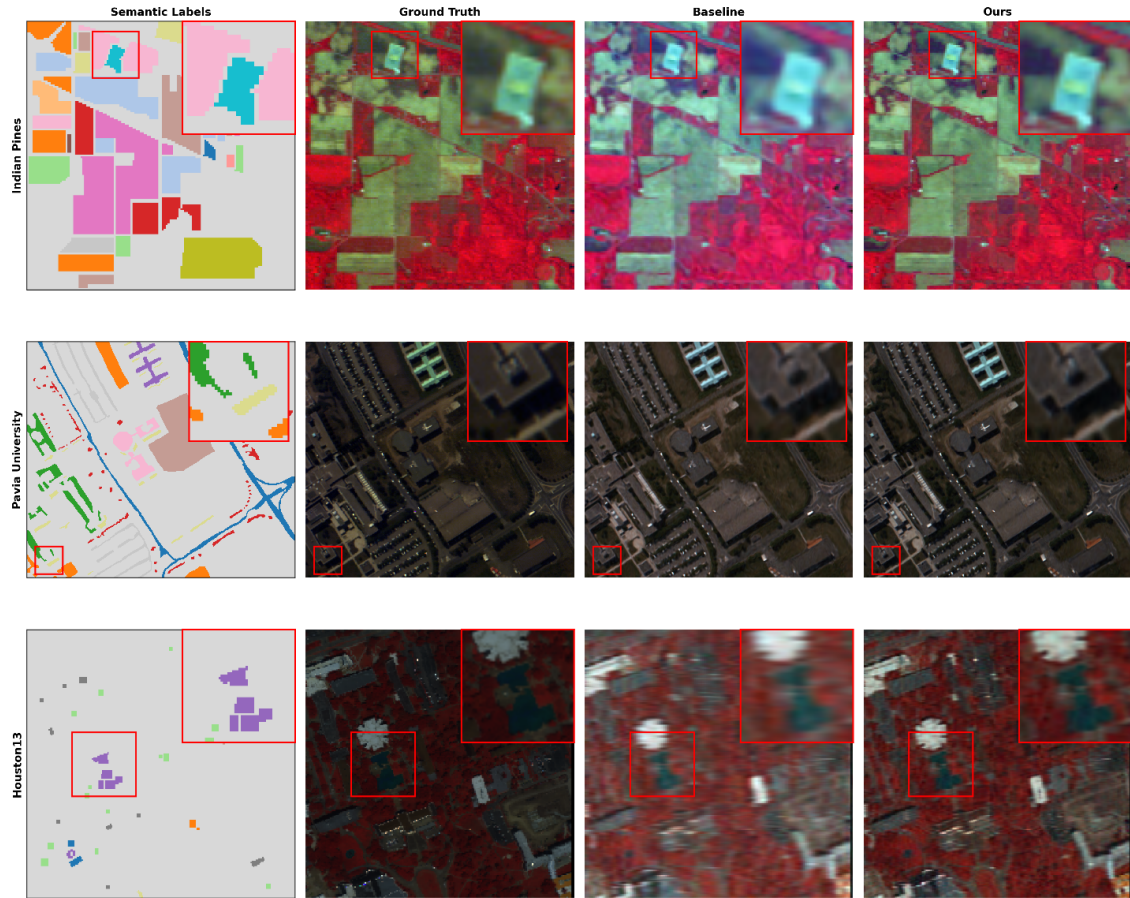


그림 3. 정성적 비교: Indian Pines, Pavia University, Houston13 데이터셋에서 무작위로 잘라낸 컬러 이미지와 참조용 시맨틱 라벨 맵, 그리고 더 명확한 비교를 위해 확대한 영역.

Fig. 3. Qualitative Comparison: False color random crops from Indian Pines and Pavia University and Houston13 datasets with corresponding semantic label maps for reference and zoomed in regions for clearer comparison.

goal of mitigating spatial oversmoothing via semantically meaningful regularization.

Figure 3 Qualitative Comparison: False color random crops from Indian Pines and Pavia University and Houston13 datasets with corresponding semantic label maps for reference and zoomed in regions for clearer comparison.

2. Ablation Studies

For fair comparison in Table 3 we show that the improvement from the proposed method comes at a modest

training-time cost: per-epoch training time increases by roughly a hundredth to a tenth of a second across datasets, reflecting the marginal added computation through the semantic head. Since the auxiliary head is discarded after training, this overhead is incurred only during encoding and has no effect on decoder size, inference time, or storage cost. We further analyze the sensitivity of our method to the semantic loss weight α using Indian Pines dataset in Figure 4, sweeping α across six orders of magnitude (10^{-6} to 10^{-2}). Both PSNR and SAM show improvement as α decreases from 10^{-2} toward 10^{-5} , reaching an optimum at $\alpha = 10^{-5}$, before performance degrades slightly at $\alpha = 10^{-6}$.

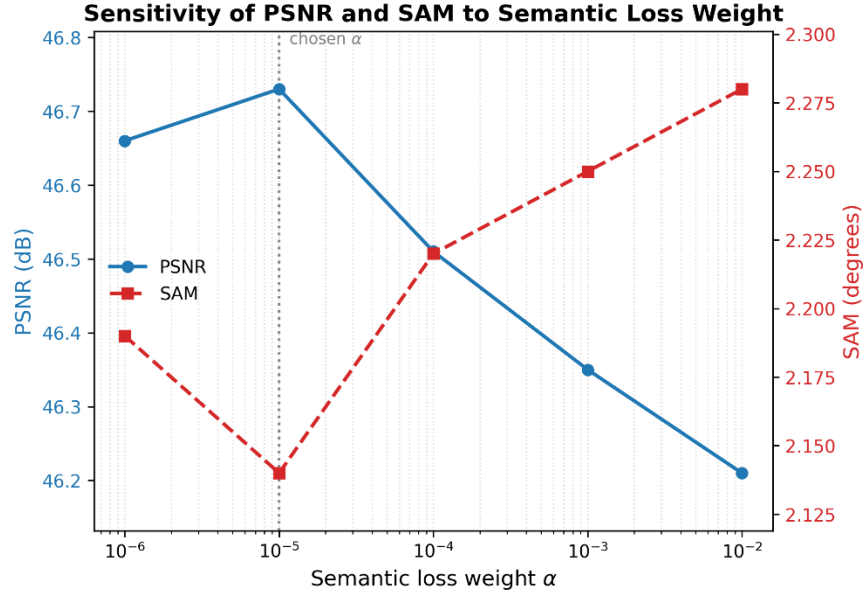


그림 4. 시맨틱 손실 가중치 α 에 대한 민감도 분석으로, 10^{-6} 에서 10^{-2} 까지 결과. α 가 감소할수록 두 지표 모두 향상되며, $\alpha = 10^{-5}$ (점선)에서 최적값에 도달함(이 값이 보고된 모든 실험에 사용됨).

Fig. 4. Sensitivity to the semantic loss weight α , swept from 10^{-6} to 10^{-2} . Both metrics improve as α decreases, reaching an optimum at $\alpha = 10^{-5}$ (dotted line), which is used for all reported experiments.

표 3. 0.27 bpppb 기준 베이스라인과의 성능 및 에폭당 학습 시간(초) 비교.

Table 3. Comparison of performance and per-epoch training-time (seconds) with the baseline at 0.27 bpppb.

Dataset	PSNR		SAM		Train time per epoch	
	Baseline	Ours	Baseline	Ours	Baseline	Ours
Indian Pines	46.68	46.73	2.19	2.14	0.006	0.007
Pavia University	37.41	37.43	4.20	4.01	0.05	0.06
Houston13	39.88	40.20	3.91	3.72	0.008	0.01

We adopt $\alpha = 10^{-5}$ for all experiments reported in this paper.

VI. Conclusion

In this work, we presented a semantic-aware INR framework for hyperspectral image compression. By successfully injecting categorical boundary awareness into the network's latent parameters, we take a step towards resolving the oversmoothing issue inherent to MSE-driven architectures. Experimental evaluations conducted on the Indian Pines and Pavia University benchmarks demonstrate

that our approach yields improved reconstruction fidelity while simultaneously reducing spectral distortion with zero added storage or inference computational overhead. A current limitation of our framework is its reliance on ground-truth class labels during training, which restricts direct applicability to unannotated HSI scenes. Future research will explore adapting the framework to leverage pre-trained AI models for generating pseudo-labels or semantic descriptions in place of manual annotations, extending this self-regulating semantic framework to unannotated HSI datasets via self-supervised or zero-shot segmentation primitives.

References

- [1] Goetz, Alexander FH, et al. "Imaging spectrometry for earth remote sensing." *science* 228.4704 (1985): 1147-1153.
doi: <https://doi.org/10.1126/science.228.4704.1147>
- [2] Adam, Elhadi, Onesimo Mutanga, and Denis Rugege. "Multispectral and hyperspectral remote sensing for identification and mapping of wetland vegetation: a review." *Wetlands ecology and management* 18.3 (2010): 281-296.
doi: <https://doi.org/10.1007/s11273-009-9169-z>
- [3] Carrasco, Oscar, et al. "Hyperspectral imaging applied to medical diagnoses and food safety." *Geo-Spatial and temporal image and data exploitation III*. Vol. 5097. SPIE, 2003.
doi: <https://doi.org/10.1117/12.502589>
- [4] Edelman, Gerda J., et al. "Hyperspectral imaging for non-contact analysis of forensic traces." *Forensic science international* 223.1-3 (2012): 28-39.
doi: <https://doi.org/10.1016/j.forsciint.2012.09.012>
- [5] Fischer, Christian, and Ioanna Kakoulli. "Multispectral and hyperspectral imaging technologies in conservation: current research and potential applications." *Studies in Conservation* 51.sup1 (2006): 3-16.
doi: <https://doi.org/10.1179/sic.2006.51.Supplement-1.3>
- [6] Ghamisi, Pedram, et al. "Advances in hyperspectral image and signal processing: A comprehensive overview of the state of the art." *IEEE Geoscience and Remote Sensing Magazine* 5.4 (2018): 37-78.
doi: <https://doi.org/10.1109/MGRS.2017.2762087>
- [7] Feng, Yao-Ze, and Da-Wen Sun. "Application of hyperspectral imaging in food safety inspection and control: a review." *Critical reviews in food science and nutrition* 52.11 (2012): 1039-1058.
doi: <https://doi.org/10.1080/10408398.2011.651542>
- [8] Govender, Megandhren, Kershani Chetty, and Hartley Bulcock. "A review of hyperspectral remote sensing and its application in vegetation and water resource studies." *Water Sa* 33.2 (2007): 145-151.
doi: <https://doi.org/10.4314/wsa.v33i2.49049>
- [9] Gowen, Aoife A., et al. "Hyperspectral imaging - an emerging process analytical tool for food quality and safety control." *Trends in food science & technology* 18.12 (2007): 590-598.
doi: <https://doi.org/10.1016/j.tifs.2007.06.001>
- [10] Liang, Haida. "Advances in multispectral and hyperspectral imaging for archaeology and art conservation." *Applied Physics A* 106.2 (2012): 309-323.
doi: <https://doi.org/10.1007/s00339-011-6689-1>
- [11] Schuler, Rebecca L., Paul E. Kish, and Cara A. Plese. "Preliminary observations on the ability of hyperspectral imaging to provide detection and visualization of bloodstain patterns on black fabrics." *Journal of forensic sciences* 57.6 (2012): 1562-1569.
doi: <https://doi.org/10.1111/j.1556-4029.2012.02171.x>
- [12] Dua, Yaman, Vinod Kumar, and Ravi Shankar Singh. "Comprehensive review of hyperspectral image compression algorithms." *Optical Engineering* 59.9 (2020): 090902-090902.
- [13] Hinton, Geoffrey E., and Richard Zemel. "Autoencoders, minimum description length and Helmholtz free energy." *Advances in neural information processing systems* 6 (1993).
doi: <https://doi.org/10.1117/1.OE.59.9.090902>
- [14] Ballé, Johannes, Valero Laparra, and Eero P. Simoncelli. "End-to-end optimized image compression." *arXiv preprint arXiv:1611.01704* (2016).
doi: <https://doi.org/10.48550/arXiv.1611.01704>
- [15] Ballé, Johannes, et al. "Variational image compression with a scale hyperprior." *arXiv preprint arXiv:1802.01436* (2018).
doi: <https://doi.org/10.48550/arXiv.1802.01436>
- [16] Dupont, Emilien, et al. "Coin: Compression with implicit neural representations." *arXiv preprint arXiv:2103.03123* (2021).
doi: <https://doi.org/10.48550/arXiv.2103.03123>
- [17] Sitzmann, Vincent, et al. "Implicit neural representations with periodic activation functions." *Advances in neural information processing systems* 33 (2020): 7462-7473.
doi: <https://doi.org/10.48550/arXiv.2006.09661>
- [18] Du, Qian, and James E. Fowler. "Hyperspectral image compression using JPEG2000 and principal component analysis." *IEEE Geoscience and Remote sensing letters* 4.2 (2007): 201-205.
doi: <https://doi.org/10.1109/LGRS.2006.888109>
- [19] Rezasoltani, Shima, and Faisal Z. Qureshi. "Hyperspectral image compression using implicit neural representations." *2023 20th Conference on Robots and Vision (CRV)*. IEEE, 2023.
doi: <https://doi.org/10.48550/arXiv.2302.04129>

저 자 소 개



Maryam Qamar

- Sep. 2009 ~ Sep. 2013 : Bachelor's degree in Computer Science at University of Azad Jammu and Kashmir, Pakistan
- Sep. 2014 ~ Mar. 2017 : Master's degree in Computer Science at National University of Sciences and Technology, Pakistan
- Mar. 2022 ~ Present : She is currently pursuing Ph.D. degree with the Department of Artificial Intelligence at Kyung Hee University, South Korea
- ORCID : <https://orcid.org/0000-0003-0774-5411>
- 주관심분야 : Computer Vision and Machine Learning

저 자 소 개



배 성 호

- Mar. 2004 ~ Feb. 2011 : Bachelor's degree in Department of Computer Engineering and Electronic Engineering (dual majors) at Kyung Hee University, South Korea
- Feb. 2011 ~ Aug. 2016 : Ph.D. in Department of Electrical Engineering at KAIST, South Korea
- Jul. 2016 ~ Aug. 2017 : Postdoc. Associate in MIT Computer Science and Artificial Intelligence Laboratory (CSAIL)
- Sep. 2017 ~ Present : Associate Professor at Kyung Hee University in school of Computing, South Korea
- ORCID : <https://orcid.org/0000-0003-2677-3186>
- 주관심분야 : Efficient Machine Learning and Computer Vision